

Public Works Capital Improvements

9th St (Peach St to Chestnut St) PROJECT SUMMARY

- **Project Length: 1260 Ft**
- **Construction Year: 2024**
- **Total Cost of Improvements: \$ 693,000**
- **Road Classification: Local Road**

Project Need


Pavement Condition

	Install Date	Condition
Pavement	1967	3 Poor
Curb & Gutter	1967	3 Poor

The section of 9th St. from Peach St. to Chestnut St. was previously constructed in 1967. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.



Cost Breakdown

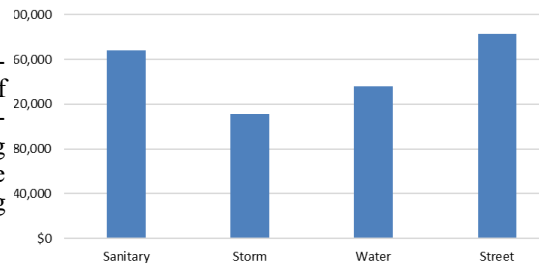

*Costs do not include WWLC material or labor costs.

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1967	Poor	12" clay tile	Replace
Water Main	Unknown	Poor	4"&6", Unknown	Replace
Storm Sewer	1967	Poor	12", 15" Concrete, Clay	Replace

Underground Utilities

The sanitary sewer is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is in poor condition and is anticipated to be replaced. The water main is in poor condition and is expected to be replaced during this project.

Project Adoption	Date
Preliminary Resolution	5/17/2022
Final Resolution	