


Public Works Capital Improvements

Lincoln St (Peach St to Expressway) PROJECT SUMMARY

- **Project Length: 2600 Ft**
- **Construction Year: 2024**
- **Total Cost of Improvements: \$ 2,118,000**
- **Road Classification: Minor Arterial**

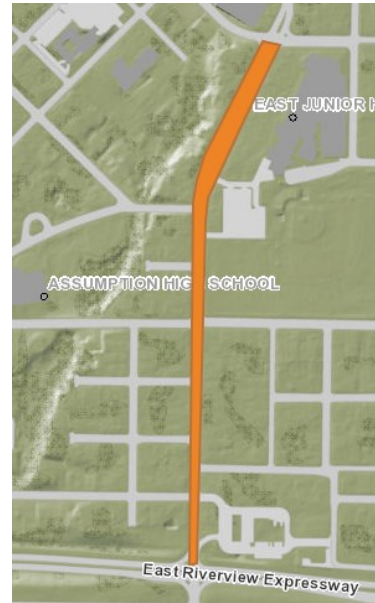


Project Need

Pavement Condition

	Install Date	Condition
Pavement	1953, 1967	4 Poor
Curb & Gutter	1953, 1967	4 Poor

The section of Lincoln St. from Peach St. to Expressway was previously constructed in 1953 and 1967. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

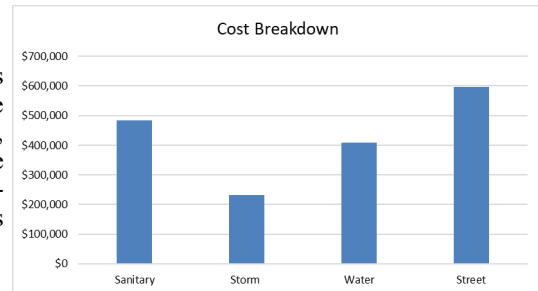

*Costs do not include WWLC material or labor costs.

Underground Utilities

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1979, 1980	Poor	8", 12" Clay, Asbestos Cement	Replace
Water Main	1967, 1968	Poor	12", 6" Ductile Iron	Replace
Storm Sewer	1968, 1980	Poor	15", 20", 24", Reinforced Concrete, Clay	Replace

Project Adoption	Date
Preliminary Resolution	9/20/2022
Final Resolution	

The sanitary sewer is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is in poor condition and is anticipated to be replaced. The water main is in poor condition and is expected to be replaced during this project.