

Public Works Capital Improvements

11th St N (Apricot St To Washington St) PROJECT SUMMARY


- **Project Length: 570 Ft**
- **Construction Year: 2021**
- **Total Cost of Improvements: \$339,000**
- **Road Classification: Minor Collector**

Project Need


Pavement Condition

	Install Date	Condition
Pavement	1957 (Franklin to Washington)	6
	1972 (Apricot to Franklin)	Poor
Curb & Gutter	1957 (Franklin to Washington)	6
	1972 (Apricot to Franklin)	Poor

The section of 11th St N from Franklin St to Washington St was previously constructed in 1957. And the section from Apricot St to Franklin St was constructed in 1972. The entire length was chip sealed in 2014. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

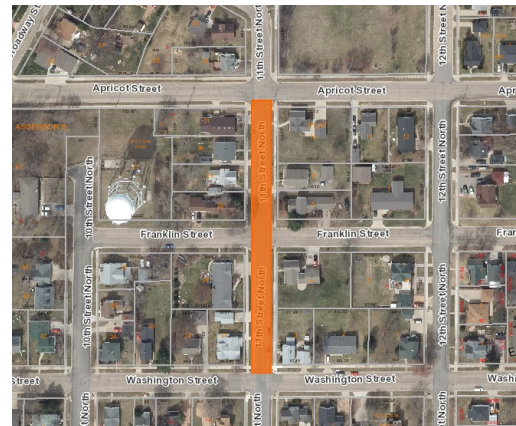

11th Street (Apricot St to Washington St)

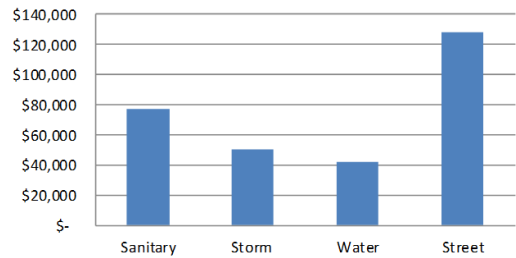

*Costs do not include WWLC material or labor costs.

Underground Utilities

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1957 1972	Poor	12" Clay	Replace
Water Main	1922	Poor	6", 12" Cast Iron	Replace
Storm Sewer	1957 1972	Average	12", 18" Concrete	None

Project Adoption	Date
Preliminary Resolution	11/20/2018
Final Resolution	

The sanitary sewers are 49 and 64 years old and are in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewers are 49 and 64 years old and in average condition but is not anticipated to be replaced. The water main is also expected to be replaced during this project due to age (98 years) and condition.