

Public Works Capital

14th Avenue North
(W. Grand Ave. to Green Bay St)


- **Project Length: 1650 Ft**
- **Construction Year: 2025**
- **Total Cost of Improvements: \$797,769**
- **Road Classification: Local Road**



Project Need

Pavement Condition

	Install Date	Condition
Pavement	1967	4 Poor
Curb & Gutter	1967	4 Poor

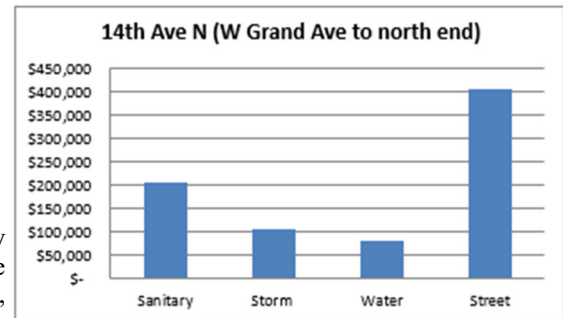

The section of 14th Ave N from W. Grand Ave to Green Bay St was previously constructed in 1967. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining with is accelerating the deterioration.

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	Unknown	Poor	Clay, PVC	Replace
Water Main	1916,1931, 2015,2018	Poor	Cast Iron, Ductile Iron	Replace
Storm Sewer	2004	Unknown	PVC, RCP, HDPE	Possible replace

Project Adoption	Date
Preliminary Resolution	2022-11-15
Final Resolution	

Underground Utilities

The sanitary sewer is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is 20 years old or newer.

2024-07-17