


Public Works Capital Improvements

15th St N (Norton St To Apricot St) PROJECT SUMMARY

- **Project Length: 825 Ft**
- **Construction Year: 2021**
- **Total Cost of Improvements: \$535,000**
- **Road Classification: Local Road**

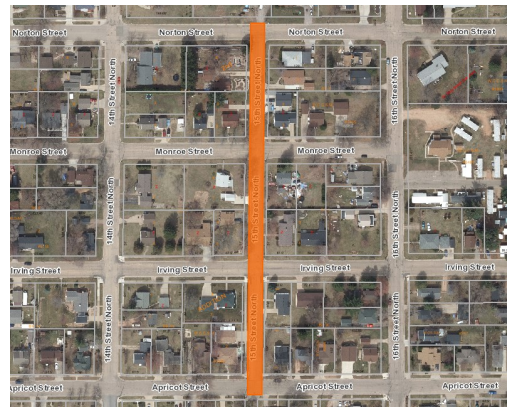


Project Need

Pavement Condition

	Install Date	Condition
Pavement	1951	5 Poor
Curb & Gutter	1951	5 Poor

The section of 15th Street N from Norton St to Apricot St was previously constructed in 1951. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

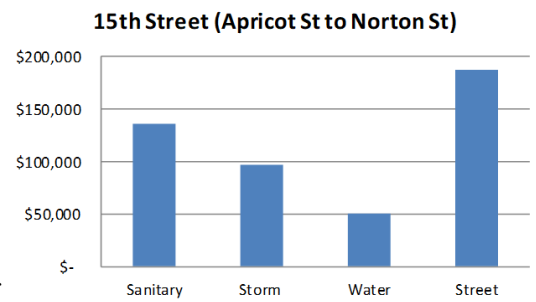

*Costs do not include WWLC material or labor costs.

Underground Utilities

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1951	Poor	8" Clay	Replace
Water Main	1951	Poor	6" Cast Iron	Replace
Storm Sewer	1951	Poor	12" Concrete	Replace

Project Adoption	Date
Preliminary Resolution	11/20/2018
Final Resolution	

The sanitary sewer is 69 years old and is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is 69 years old and in poor condition and is anticipated to be replaced. The water main is also 69 years old and expected to be replaced during this project.