

# Public Works Capital

## 9th Ave N (8th Ave. to Fremont St.) PROJECT SUMMARY


- **Project Length: 1300 Ft**
- **Construction Year: 2022**
- **Total Cost of Improvements: \$ 878,000**
- **Road Classification: Local Road**

### Project Need

#### Pavement Condition

	Install Date	Condition
Pavement	1960	3 Poor
Curb & Gutter	1960	3 Poor

The section of 9th Ave, from 8th Ave N to Fremont St. was previously constructed in 1960. The road was previously chip sealed in 2015. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

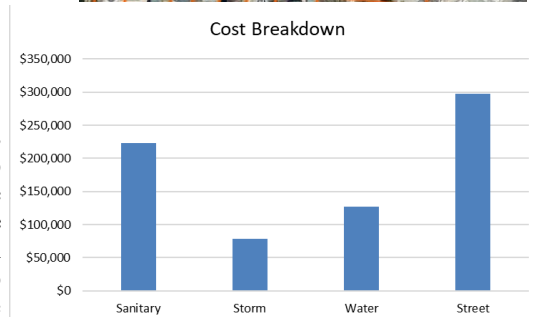

\*Costs do not include WWLC material or labor costs.

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1940	Poor	15",12" Clay	Replace
Water Main	1940	Poor	6" Unknown	Replace
Storm Sewer	1960	Poor	12" Reinforced concrete/ unknown	Replace

### Underground Utilities

Project Adoption	Date
Preliminary Resolution	1/15/2019
Final Resolution	

The sanitary sewer is 80 years old and is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is 60 years old and in poor condition and is anticipated to be replaced. The water main is 80 years old and is expected to be replaced during this project.

9/18/2020