

Public Works Capital Improvements


Cherry St (Riverview Dr. to 1st St N.) PROJECT SUMMARY

- **Project Length: 600 Ft**
- **Construction Year: 2022**
- **Total Cost of Improvements: \$322,000**
- **Road Classification: Local Road**

Project Need

Pavement Condition

	Install Date	Condition
Pavement	1953	3 Poor
Curb & Gutter	1953	3 Poor

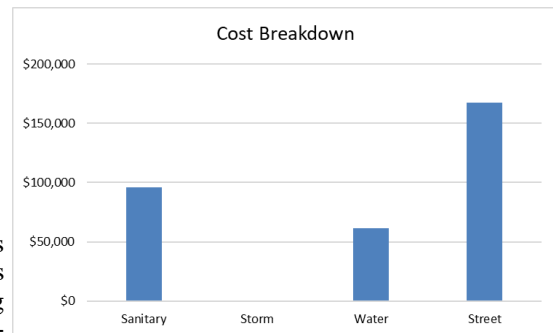

The section of Cherry St. from Riverview Dr. to 1st St. N. was previously constructed in 1953. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is ac-

*Costs do not include WWLC material or labor costs.

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1953	Poor	8" Clay / PVC	Replace
Water Main	1941	Poor	6" Unknown	Replace
Storm Sewer	1953	Poor	12", 15" Clay/ PVC	None

celerating the deterioration.

Underground Utilities

Project Adoption	Date
Preliminary Resolution	1/15/2019
Final Resolution	

The sanitary sewer is 67 years old and is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is 67 years old and in poor condition and is not anticipated to be replaced. The water main is 79 years old and is expected to be replaced during this project.

8/4/2020