


# Public Works Capital Improvements

## Fremont St (7th Ave. N to 10th Ave N.) PROJECT SUMMARY

- **Project Length: 1057 Ft**
- **Construction Year: 2022**
- **Total Cost of Improvements: \$608,000**
- **Road Classification: Minor Collector**

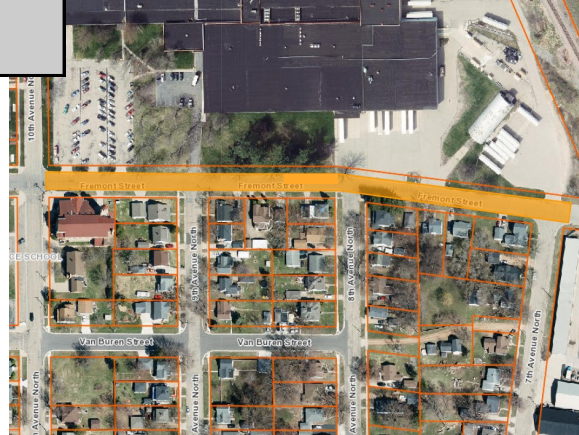


### Project Need

#### Pavement Condition

	Install Date	Condition
<b>Pavement</b>	1960	4 Poor
<b>Curb &amp; Gutter</b>	1960	4 Poor

The section of Fremont St. from 7th Ave N. to 10th Ave N. was previously constructed in 1960. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

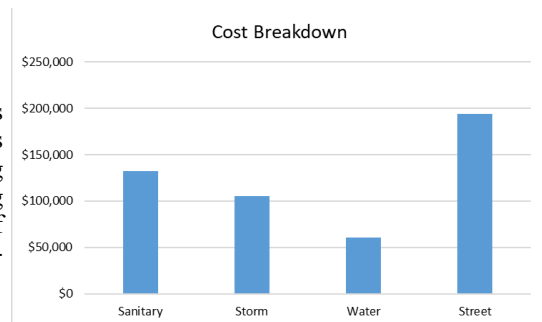

\*Costs do not include WWLC material or labor costs.

#### Underground Utilities

	Install Date	Condition	Material	Proposed Work
<b>Sanitary Sewer</b>	1946	Poor	8" Unknown	Replace
<b>Water Main</b>	1946,1968	Poor	6" Unknown/DI	Replace
<b>Storm Sewer</b>	1960	Poor	12", 15",18",24" Unknown	Replace

#### Project Adoption

#### Date

<b>Preliminary Resolution</b>	1/15/2019
<b>Final Resolution</b>	

The sanitary sewer is 76 years old and is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is 62 years old and in poor condition and is anticipated to be replaced. The water main is 76 years old and is expected to be replaced during this project.

9/21/2020