

Public Works Capital Improvements

Harrison Street (9th Ave N to 7th Ave N)


- **Project Length: 810 Ft**
- **Construction Year: 2025**
- **Total Cost of Improvements: \$288,475**
- **Road Classification: Local Road**



Project Need

Pavement Condition

	Install Date	Condition
Pavement	1962	3 Poor
Curb & Gutter	1962	3 Poor

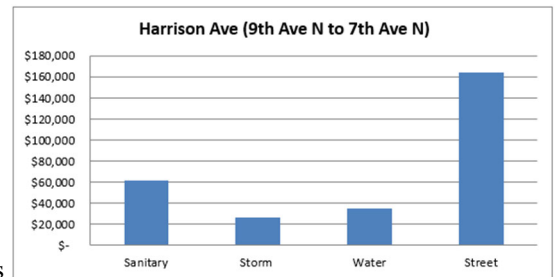

The section of Harrison St from 9th Ave N to 7th Ave N was previously constructed in 1962. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining with is accelerating the deterioration.

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1967/2022	Good	Clay/PVC	Replace
Water Main	1922	Poor	Unknown	
Storm Sewer	Replaced in 2022	Good	PVC	

Underground Utilities

Project Adoption	Date
Preliminary Resolution	2024-07-18
Final Resolution	

The sanitary sewer is in poor condition with severe cracking and potential failure, and is anticipated to be replaced.