Public Works Capital Improvements

High St (7th Ave N To 10th Ave N) PROJECT SUMMERY

- **Project Length: 1000 Ft**
- **Construction Year: 2018**
- **Total Cost of Improvements: $832,127**
- **Road Classification: Minor Collector**

Project Need

Pavement Condition

	Install Date	Condition
Pavement	1967	Paser 6 Cold Mix
Curb & Gutter	1967	marginal

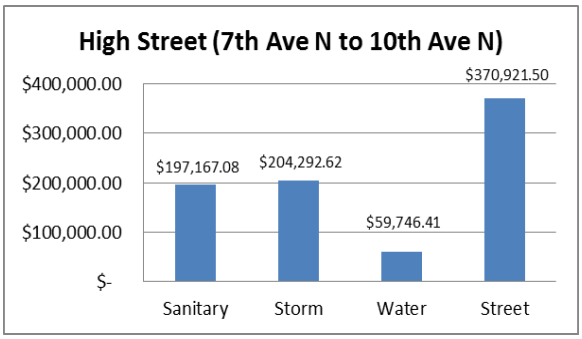

The section of High Street from 7th Ave N to 10th Ave N was previously constructed in 1967. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

Underground Utilities

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1967-68	poor	8” Clay, asbestos cement	Replace
Water Main	1968	poor	6” Ductile Iron	Replace
Storm Sewer	1929	Cracks	36” Clay	Replace

Rutting & Raveling

Project Adoption	Date
Preliminary Resolution	1/16/2018
Final Resolution	

The sanitary sewer is 50 years old and is in poor condition and is anticipated to be replaced. The storm sewer is 89 years old and in poor condition with severe cracking and is anticipated to be replaced due to its age. The water main is expected to be replaced during this project due to age (50 years) and condition.

4/5/2018