

Public Works Capital Improvements

Plover St
(1st St N to Apricot St)


- **Project Length: 1500 Ft**
- **Construction Year: 2025**
- **Total Cost of Improvements: \$889,175**
- **Road Classification: Minor Collector**



Project Need

Pavement Condition

| | Install Date | Condition |
|---------------|--------------|-----------|
| Pavement | 1971 | 5 Poor |
| Curb & Gutter | 1971 | 5 Poor |

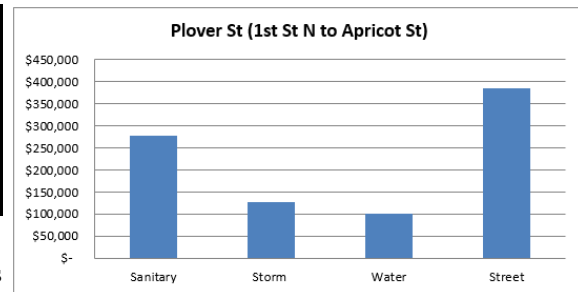

The section of Plover St from 1st St N to Apricot St was previously constructed in 1971. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining with is accelerating the deterioration.

| | Install Date | Condition | Material | Proposed Work |
|----------------|------------------|-----------|--------------|---------------|
| Sanitary Sewer | 1971 | Poor | Clay | |
| Water Main | 1917, 1948 | Poor | Ductile Iron | Replace |
| Storm Sewer | 1971, 1973, 1993 | Poor | RCP | |

Underground Utilities

| Project Adoption | Date |
|------------------------|------------|
| Preliminary Resolution | 2024-06-18 |
| Final Resolution | |

The water main is 76 years old and is in poor condition and is expected to be replaced during this project.