

Public Works Capital Improvements

Smith St (Railroad St to Riverview Drive) PROJECT SUMMARY

- **Project Length: 1592 Ft**
- **Construction Year: 2022**
- **Total Cost of Improvements: \$ 992,000**
- **Road Classification: Local Road**

Project Need

Pavement Condition

	Install Date	Condition
Pavement	1953	4 Poor
Curb & Gutter	1953	4 Poor



The section of Smith St. from Railroad Street to Riverview Drive was previously constructed in 1953. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

Underground Utilities

	Install Date	Condition	Material	Proposed Work
Sanitary Sewer	1953	Poor	8" Clay / PVC	Replace
Water Main	1946 1948 1958	Poor	6" Unknown	Replace
Storm Sewer	1953	Poor	12", 15" Clay/ Unknown	Replace

Project Adoption	Date
Preliminary Resolution	1/15/2019
Final Resolution	

The sanitary sewer is 69 years old and is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is 69 years old and in poor condition and is anticipated to be replaced. The water main is 74 years old and is expected to be replaced during this project.

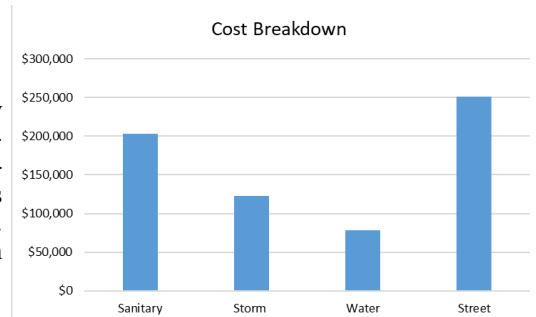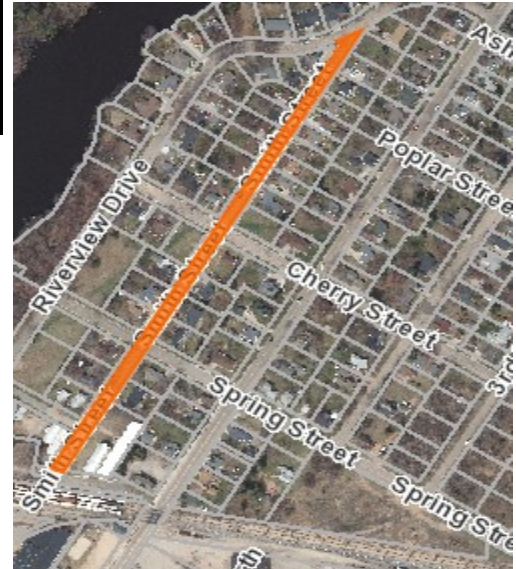

*Costs do not include WWLC material or labor costs.