

Public Works Capital Improvements


Wylie St (8th St to 12th St) PROJECT SUMMARY

- **Project Length: 1320 Ft**
- **Construction Year: 2024**
- **Total Cost of Improvements: \$ 736,000**
- **Road Classification: Local Road**



Project Need

| | Install Date | Condition |
|--------------------------|--------------|-----------|
| Pavement | 1953 | 4 Poor |
| Curb & Gutter | 1953 | 4 Poor |

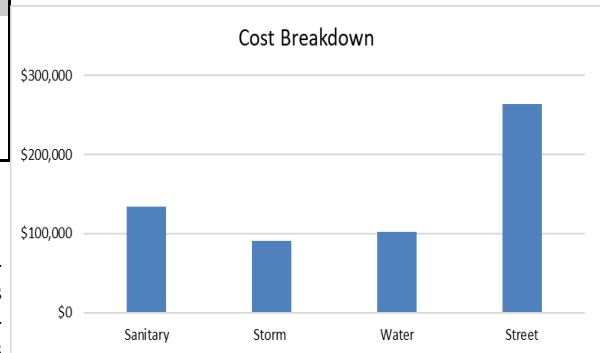

Pavement Condition

The section of Wylie St. from 8th St. to 12th St. was previously constructed in 1953. The pavement structure is at its end of life. The asphalt pavement is no longer flexible, settling and rutting are evident. The curb and gutter sections are faulting along with several areas of missing pieces of curb. Settlement of the curb and gutter has also limited draining which is accelerating the deterioration.

*Costs do not include WWLC material or labor costs.

| | Install Date | Condition | Material | Proposed Work |
|-----------------------|--------------|---------------|-------------------|---------------|
| Sanitary Sewer | 1931 | Poor | Clay Pipe | Replace |
| Water Main | 1931/1989 | Poor | Ductile Iron | Replace |
| Storm Sewer | 1953 | Poor/ Fair | Clay Pipe/ RCP | Replace |

| Project Adoption | Date |
|-------------------------------|--------------------------|
| Preliminary Resolution | 10/18/2022 (8th—10th) |
| Final Resolution | |

Underground Utilities

The sanitary sewer is in poor condition with severe cracking and potential failure, and is anticipated to be replaced. The storm sewer is 70 years old and is anticipated to be replaced. The water main is 33 to 91 years old and is in poor condition and is expected to be replaced during this project.

2023/07/13